


OPTIONAL EQUIPMENT

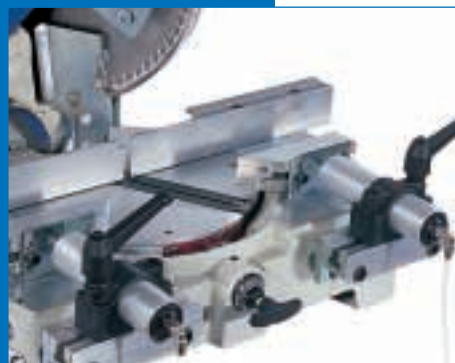

Pneumatic Horizontal Clamp
720870270000
(T55-300, MEC 300 ST)

Pneumatic Horizontal Clamp
720870500073 (right)
for (T50-350, T53-370)

Pneumatic Horizontal Clamp
720870500054 (left)
for (T50-350, T53-370)

Quick Table
Rotation

720700550000
(T55-300)

(not available for
MEC 300 ST,
T50-350,
T53-370)



720110480000
(T55-300, MEC 300 ST)

Manual Horizontal Clamps
720110490000
for (T50-350)

Scaled Table
Extension with
Fence in Inches

720500628497
(T55-300, MEC
300 ST)

720500623797
Metric (T50-350)

720501860097
Inches (T53-370)



720650620092 --
Plexi Flip Over Stop



Pneumatic Vertical Clamp
720810510000
only for (T50-350, T53-370)

Dust Collecting
Cabinet
720010610000
for (T55-300,
MEC 300 ST,
T50-350)

720011680000
(T53-370)



Foot Clamps
720920620097



OMGA, Inc.
3705 William Richardson Drive
South Bend, IN 46628
Toll Free: (800) 233-6642
Phone: (574) 243-0120 • Fax: (574) 243-0216
E-mail: info@omgainc.com
Website: www.omgainc.com

Distributed By:

T 55 300
MEC 300 ST
T 50 350
T 53 370



Mitre Saws



T 55 300

The T 55 300 precision mitre saw features OMGA's sturdy cast construction in a direct-drive model for added economy. The T 55 300 "SACA" setup is

designed for the precision cutting of the picture frame industry. The T 55 300 can be equipped with a wide array of OMGA accessories.



T55-300
"SACA"



T 55 300

Cross cut capacity	90°	5-1/8"
Cross cut capacity	45°	3-3/4"
Max. depth of cut		3"
Motor power	HP	1.6
Saw bore		1"
Saw diameter		12"
Arbor speed	RPM	3400
Dust chute		3-1/8"
Miter positive stops	90° - 45° - 30° - 22-1/2° - 15° - 10°	
Table size		20-1/2" x 14" x 4-3/4"
Crated dimensions		21" x 22" x 30"
Approx. shipping weight	lbs.	100

T 50 350

The T 50 350 precision mitre saw features OMGA's durable cast-iron construction and includes a rotating table and self-centering locking system for 90°, 45°, 30°, 22.5°, 30°, 15° and 10°

for both right and left cuts. It has a manual locking device for all intermediate angles. This popular model can be equipped with a wide range of OMGA accessories.



T 50 350

Cross cut capacity	90°	6-3/4"
Cross cut capacity	45°	4-3/4"
Max. depth of cut		4-5/16"
Motor power	HP	3
Saw bore		1"
Saw diameter		14"
Arbor speed	RPM	3400
Dust chute		3-1/8"
Miter positive stops	90° - 45° - 30° - 22-1/2° - 15° - 10°	
Table size		23-5/8" x 17-1/8" x 5-3/16"
Crated dimensions		26" x 25" x 30"
Approx. shipping weight	lbs.	269

MEC 300 ST

The MEC 300 ST precision mitre saw is a belt-driven model. It features OMGA's all cast construction and includes OMGA's rotating table, self-locking

mechanism for main angles and manual locking system for all intermediate angles. It can be equipped with all the popular OMGA accessories.

MEC 300 ST

Cross cut capacity	90°	5-1/8"
Cross cut capacity	45°	4"
Max. depth of cut		3-3/8"
Motor power	HP	2.2
Saw bore		1"
Saw diameter		12"
Arbor speed	RPM	3400
Dust chute		3-1/8"
Miter positive stops	90° - 45° - 30° - 22-1/2° - 15° - 10°	
Table size		20-1/2" x 14" x 4-3/4"
Crated dimensions		21" x 22" x 30"
Approx. shipping weight	lbs.	144

T 53 370

The T 53 370 precision mitre saw features OMGA's strong cast-iron construction in a belt-drive model. The head can be tilted up to 45° vertical axis

to perform compound angle cuts to any possible angle between 0° and 45°. It can be equipped to accept a wide array of OMGA accessories.

T 53 370

Cross cut capacity	90°	6-11/16" / 7-1/4"
Cross cut capacity	45°	4-3/4" / 5-7/8"
Max. depth of cut		4-5/16" / 4-3/8"
Motor power	HP	4
Saw bore		1"
Saw diameter		14" / 15"
Arbor speed	RPM	3400
Dust chute		3-1/8"
Miter positive stops	90° - 45° - 30° - 22-1/2° - 15° - 10°	
Table size		26" x 20" x 5-5/16"
Crated dimensions		30" x 32" x 30"
Approx. shipping weight	lbs.	374
Max. Depth 1 head at 45°		2"

